



EVENT RECORDER


- 18 Digital Inputs
- 4 Analog Inputs
- 8 Virtual Inputs
- Relay Output
- Train Speed Monitor
- 190,304 Event Record storage (expandable)
- Event Records stored for past 128 days
- Non-volatile flash memory (no internal battery)
- RS-232 Terminal Port
- 40-character liquid crystal display
- 20-position keypad
- Detachable input connectors
- 2,000 Vac isolation
- Optional 33.6K Baud internal modem

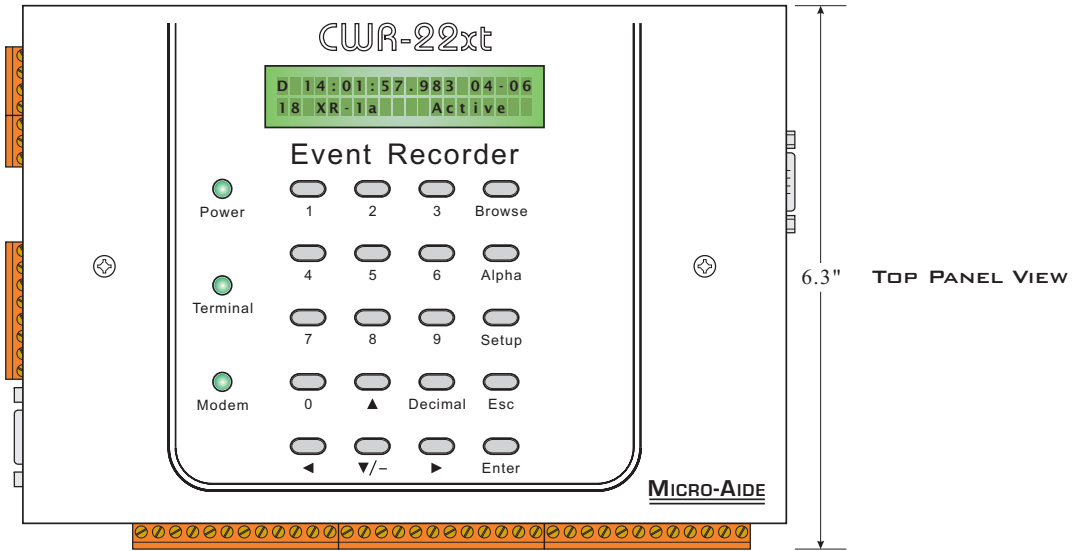


6.3" TOP PANEL VIEW

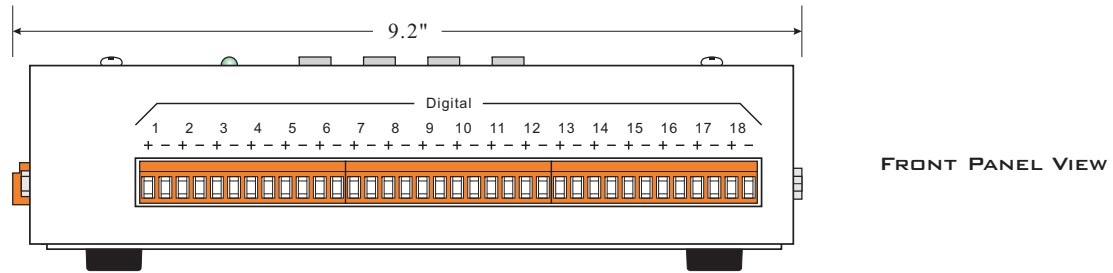

9.2" FRONT PANEL VIEW

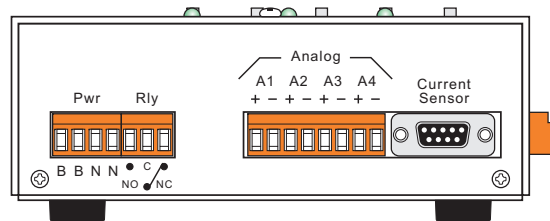

LEFT PANEL VIEW

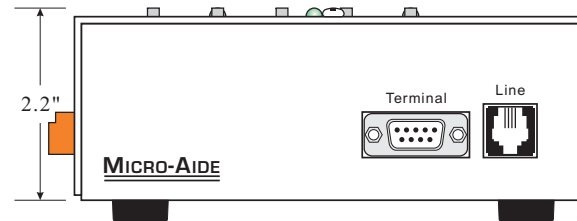

2.2" RIGHT PANEL VIEW

CWR-22xt
MICRO-AIDE