

EVENT RECORDER


- Mounts within 19" equipment rack
- 256 Digital Inputs
- 8 Analog Inputs
- 16 Virtual Inputs
- 200 Programmable Timer Inputs
- 2 Relay Outputs
- 8 Train Speed Monitors
- 115,840 Event Record storage (expandable)
- Event Records stored for past 128 days
- Non-volatile flash memory (no internal battery)
- Temperature reporting
- Inkjet or Laserjet Printer Port
- RS-232 Terminal Port
- 80-character liquid crystal display
- 20-position keypad
- Detachable input connectors
- 2,000 Vac isolation
- Optional 33.6K Baud internal modem

CWR-264
MICRO-AIDE




REAR PANEL VIEW

LEFT PANEL VIEW

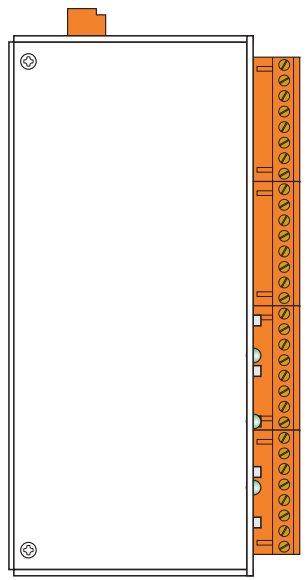

RIGHT PANEL VIEW

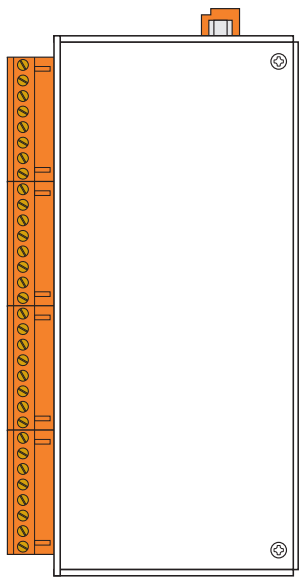

CWR-264
MICRO-AIDE