

MICRO-AIDE

www.micro-aide.com



CWR-264E Event Recorder

Key Features

- 256 Digital Inputs
- 8 Analog Inputs
- 96 Virtual Inputs
- 200 programmable Timer Inputs
- Dual Relay Outputs
- 8 Train Speed Monitors
- 97,660 Event Record capacity (expandable)
- Event Records stored for up to 128 days
- Non-volatile flash memory (no internal batteries)
- Automatic Daylight Saving Time correction
- Zero clock drift via SNTP (requires Ethernet option)
- Temperature reporting
- Modbus interface
- Dual RS-232 Ports
- 80-character LCD
- 20-position keypad
- Parallel printer port
- Detachable, screw-down input and power connectors
- 2,000Vac isolation
- Mounts directly into 19" equipment rack
- Optional 10/100 Base-T Ethernet Port
- Optional 33.6K Baud internal modem

Ideally suited to large interlockings and classification yards




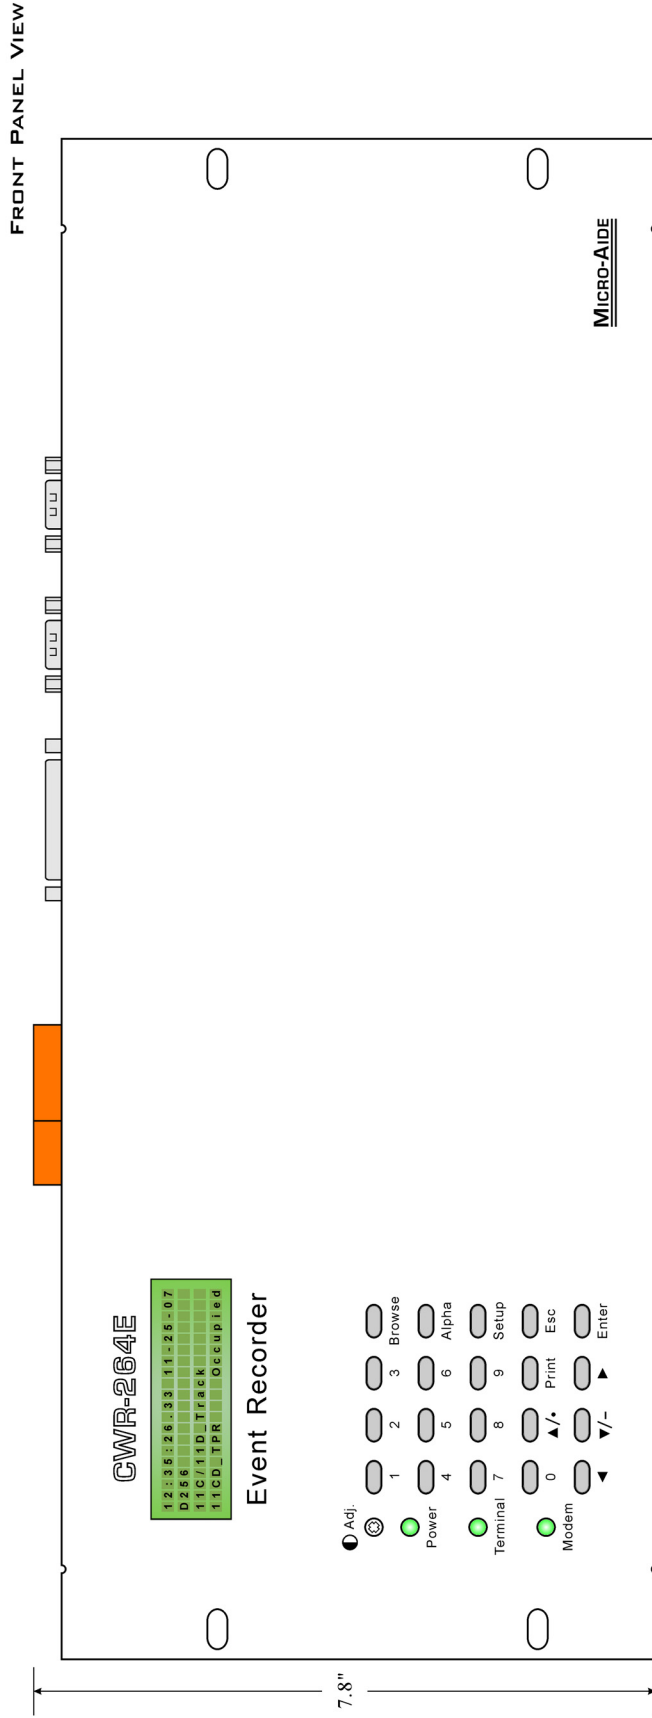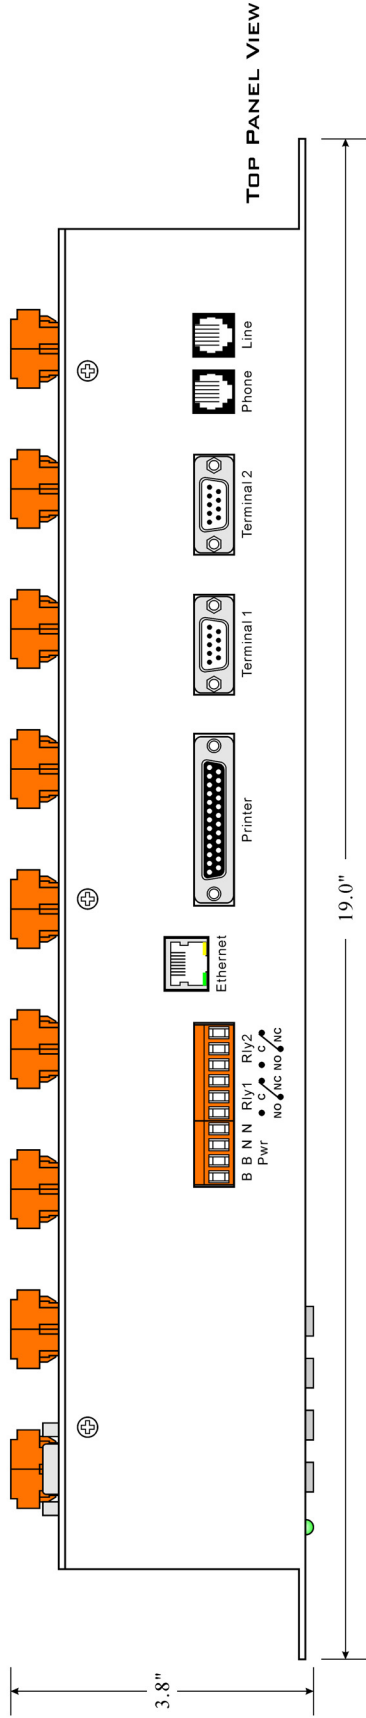


MICRO-AIDE

GWR-264E
EVENT RECORDER


REAR PANEL VIEW

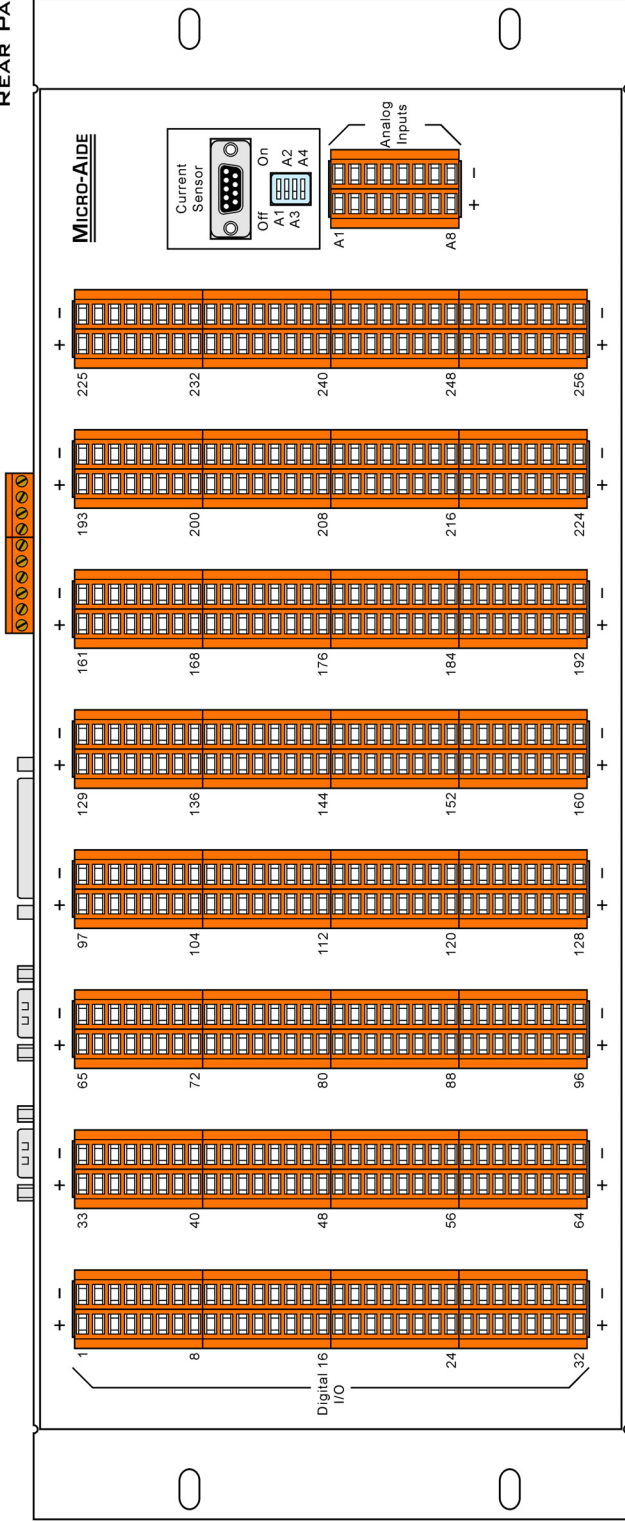

LEFT PANEL VIEW

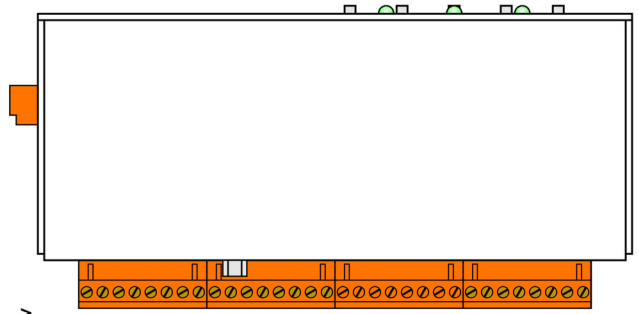

RIGHT PANEL VIEW

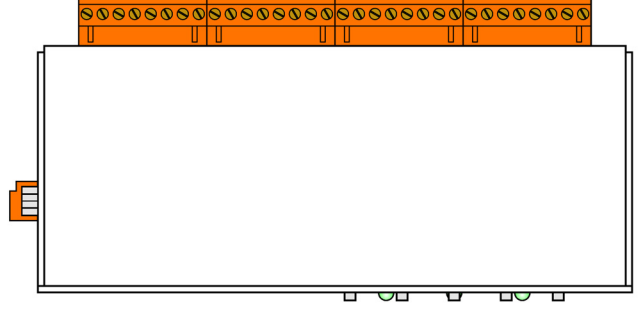

CWR-264E
EVENT RECORDER



MICRO-AIDE