

MICRO-AIDE

www.micro-aide.com

CWR-56

Event Recorder


Key Features

- 48 Digital Inputs
- 8 Analog Inputs
- 16 Virtual Inputs
- 32 programmable Timer Inputs
- Dual Relay Outputs
- 4 Train Speed Monitors
- 123,040 Event Record capacity (expandable)
- Event Records stored for up to 128 days
- Non-volatile flash memory (no internal batteries)
- Automatic Daylight Saving Time correction
- Temperature reporting
- RS-232 Port
- 80-character LCD
- 20-position keypad
- Parallel printer port
- Detachable, screw-down input and power connectors
- 2,000Vac isolation
- Mountable on shelf or 19" equipment rack
- Optional 33.6K Baud internal modem


Ideally suited to interlocking and control point applications




TOP PANEL VIEW

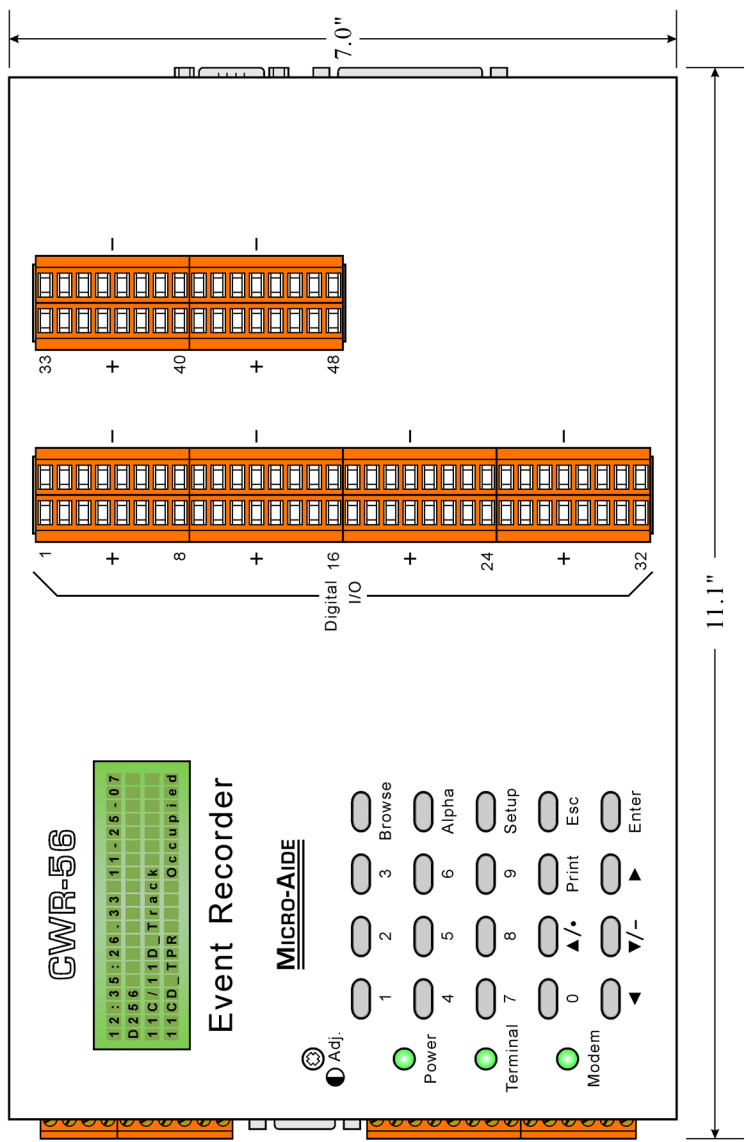

LEFT PANEL VIEW

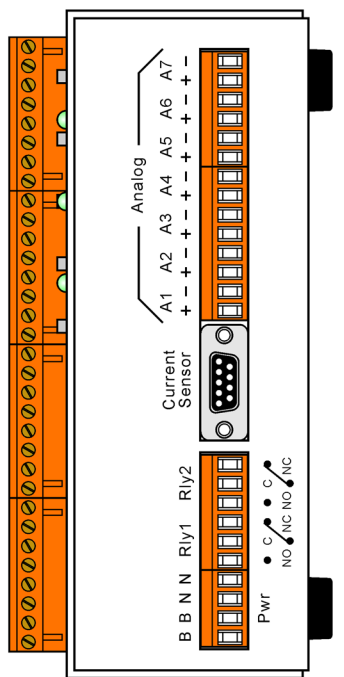

RIGHT PANEL VIEW

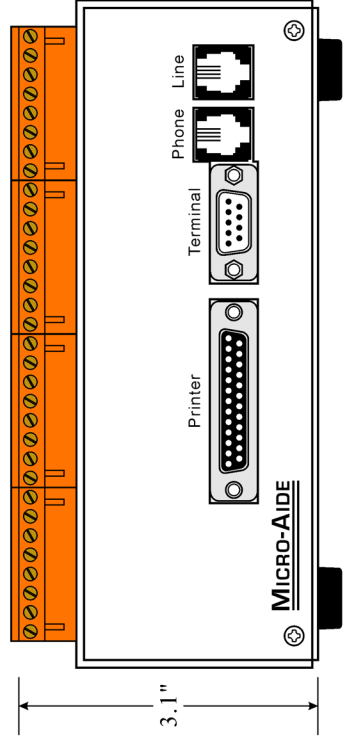

MICRO-AIDE

CWR-56
EVENT RECORDER