

## CWR-72

## Event Recorder


### Key Features

- 64 Digital Inputs
- 8 Analog Inputs
- 16 Virtual Inputs
- 32 programmable Timer Inputs
- Dual Relay Outputs
- 4 Train Speed Monitors
- 123,040 Event Record capacity (expandable)
- Event Records stored for up to 128 days
- Non-volatile flash memory (no internal batteries)
- Automatic Daylight Saving Time correction
- Temperature reporting
- RS-232 Port
- 80-character LCD
- 20-position keypad
- Parallel printer port
- Detachable, screw-down input and power connectors
- 2,000Vac isolation
- Mountable on shelf or 19" equipment rack
- Optional 33.6K Baud internal modem

*Ideally suited to interlocking and control point applications*



TOP PANEL VIEW

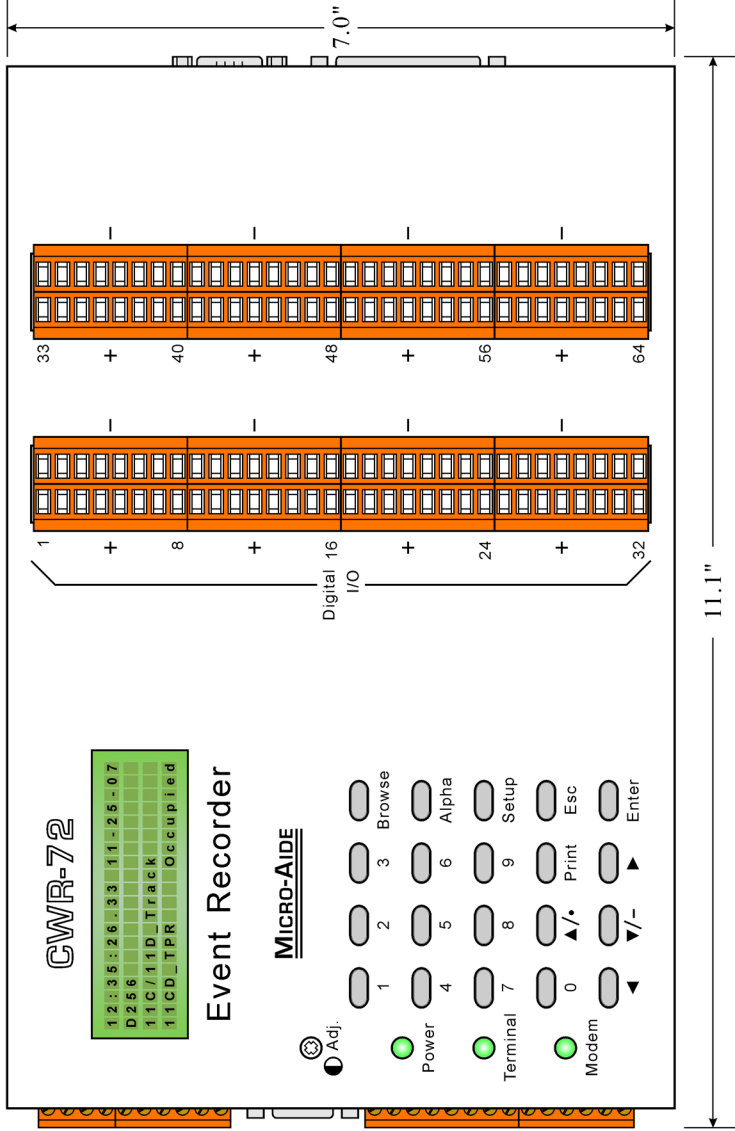

CWR-72

```


12:35:26.33 11-25-07
D256
11C/11D Track
11CD_TPR Occupied
    
```

Event Recorder


MICRO-AIDE

- Adj. (potentiometer)
- Power (green LED)
- Terminal (green LED)
- Modem (green LED)
- 1 Browse
- 2 3
- 4 5
- 7 8
- 0 ▲/•
- 3 Browse
- 6 Alpha
- 9 Setup
- Print
- Esc
- Enter

LEFT PANEL VIEW

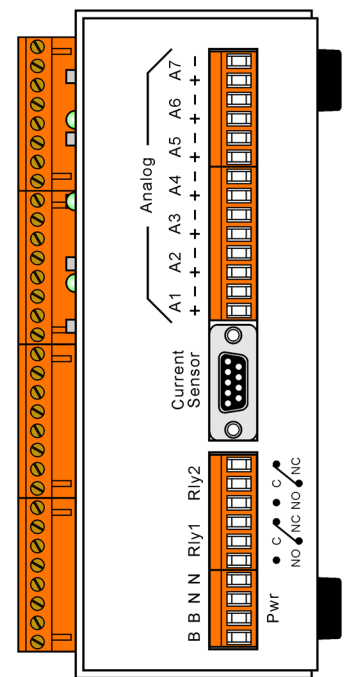

RIGHT PANEL VIEW

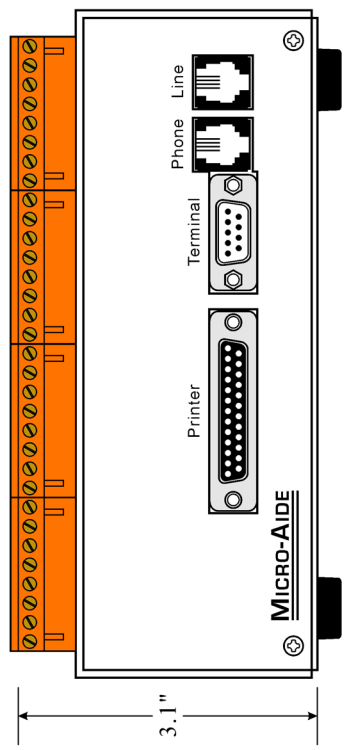

MICRO-AIDE

CWR-72  
EVENT RECORDER