

# APPENDIX A – TECHNICAL DATA

## CWR-264AP SPECIFICATIONS

### Physical

#### Size

Length: 19.0"

Height: 8.1" (requires 10.5" of rack space)

Depth: 2.5"

#### Weight

3.8lb.

### Environmental

#### Storage

Temperature: -50 °C to 85 °C

Humidity: 0 to 95%, non-condensing

#### Operating

Temperature: -40 °C to 72 °C

Humidity: 0 to 95%, non-condensing

### Mounting

Standard: mounts in 19" rack

Optional: 23" rack mounting brackets available

### Construction

#### Chassis

Fully enclosed, anodized aluminum

Externally accessible keypad, LEDs and connectors

#### Electrical

All components mounted on conformal coated, internal PCBs

### Power

#### Voltage

Range: 9 to 36 Vdc

#### Consumption

Typical: 2.8W

Maximum: 3.5W (with GPS Receiver option)

### Isolation

#### Power

Minimum: 3800 Vdc from B and N terminals to chassis and inputs

#### Ethernet Port

Minimum: 3800 Vdc to any terminal

#### USB Host and Device Ports

Minimum: 3800 Vdc to any terminal

#### Internal Modem

Designed to meet FCC part 68 standards

### Capacities

#### Secondary Units

16

#### Inputs

Digital: 4096 with 16 Secondary Units, all optically isolated

Analog: 64 with 16 Secondary Units, voltage only

Virtual: 32, user-assigned

Timer: 99, user-assigned

Train Speed Monitor: 16, user-assigned

#### Outputs

Relay: 2, form C, rated for 2A at 24Vdc or 1A at 125Vac, maximum switching capacity of 125VA or 60W, service life 1 million electrical (typical)

#### Event Storage

Standard: 5,080,576 records

Maximum: 5,080,576 records

#### Liquid Crystal Display

Characters: 80 total on 4 lines

Viewing Area: 2.8" by .8"

#### Front Panel Keypad

Quantity: 20 keys

### Virtual Inputs

#### Definitions

Any logical association shared by 1 to 4 variables (i.e., Digital, Analog, Timer or other Virtual Inputs)

Assigned by defining the state of the Virtual Input for each combination of variable states

#### Reporting

Creates standard Event Records

Relays can be controlled by each Virtual Input

Modem can be enabled to dial out Event Records

### Timer Inputs

#### Programming

Any input can be assigned as a trigger or terminating source

On or Off events can be assigned as a trigger or terminating source

#### Limit Values

High and Low Limits: in multiples of .1 seconds

Range: 0.0 to 999.9 seconds

#### Reporting

Measured Time is reported in each Timer Input Event Record

Violation of Limit Values are also reported

### Temperature Sensing

Usage: measures and reports internal temperature of Primary Unit and each Secondary Unit

High and Low Limits: -67 °F to 257 °F

### Train Speed Monitor

#### Operation

Reports excessive train speed

Logs standard Event Record

#### Sensors

Digital Inputs: 2 required

Distance: 50' to 5280'

#### Limit Values

5 to 180 mph

### Memory

#### Type

Non-volatile, Event Records and Setup Database are stored in flash memory chip

Newest data over-writes oldest data, 129th day over-writes first day

#### Storage Longevity

Infinite with power off

Rated for 100,000 write operations

### Ports

#### RS-232

Quantity: 2, for use with a PC

Terminal Emulation: ANSI

Baud Rates: 300, 600, 1200, 2400, 4800, 9600, 19,200, 38,400, 57,600, 115,200

Bit Format: 8-N-1

#### USB Host

Compatible with any FAT-32 formatted flash drive

Can create a text file of Event Record data from any time span

Can be used to update firmware

#### USB Device

Eliminates need for serial comm port, data transfer rates of 4.71 Mbps

#### Ethernet

Type: 10/100 Base-T

Protocols: TCP/IP, Telnet, Modbus, SNTP-unicast and -Multicast,

Concurrent Sessions: Modbus (3), Telnet (1)

Provides remote or local access via TCP/IP

Data transfer rates of 4.70 Mbps

User-assignable IP Address, port, sub-net mask, Unicast IP Address, Secondary Unit IP Addresses and UDP port

#### Modem

Provides remote access, auto-answer

#### GPS Receiver (optional)

Used to provide precise, real-time clock control, latitude and longitude coordinates

A

**Connectors****Power**

Detachable, tension clamp, 4-position, 12 to 22 AWG

Dual B and N terminals

**Relays (2)**

Detachable, tension clamp, 6-position, 12 to 22 AWG

Normally open, normally closed and common terminals per relay

**Terminal Port (2)**

DE-9 male, configured as modified DCE

**USB Host Port**

USB Type A female

**USB Device Port**

USB Type B female

**Ethernet Port**

RJ-45 female

**Telephone Line**

RJ-11 female

**GPS Receiver (optional)**

MCX female

**Indicators****LCD Panel**

Includes LED back lighting for enhanced visibility

Displays numerous command menus for configuring the Primary Unit and retrieving data

**Front Panel LEDs (3)**

**GPS/Alarm:** flashes green with GPS receive data, red for intra-system LAN or GPS failure

**Terminal:** green, flashes with send and receive data

**Modem:** green, flashes with send and receive data and ringing

**Ethernet Port LEDs (2)**

**Green:** link established

**Yellow:** data activity

**Controls****Keypad**

Located on front panel, below LCD

**Keys:** 0-9, Browse, Alpha, Setup, Esc, Enter, Save/., left, right, up, down/-

**LCD Contrast Adjust**

Single-turn pot., accessible from front panel

**Internal Clock****Accuracy**

**Typical:** ±8 seconds per month (3ppm) when not synchronized

**Volatility:** maintains accuracy for minimum of 30 days with loss of power

**Resolution:** .01 seconds for all Event Records

**Sync**

**SNTP-Unicast:** via time server, 5 minutes past each hour

**SNTP-Multicast:** per time server schedule

**GPS:** once per hour (requires GPS Receiver option)

**Operation**

**Time Zones:** selectable from 7 different North American settings and UTC-0

**Daylight Saving Time:** enable or disable automatic adjustment

**Leap Year:** automatically adjusted

**Secondary Unit Time Keeping**

Time set message sent to all Secondary Units once every 10 seconds

**GPS Receiver (optional)**

Includes PCB and external antenna

**PCB**

Plugs into mating connector inside Primary Unit

**Antenna**

**Size:** diameter 1.8", height .6" (not including mounting screw)

**Weight:** 2 oz. (less cable)

**Operating Temperature:** -40°C to 85°C

**Mounting:** bulkhead mountable to any surface less than 3/8" thick

**Location:** unobstructed skyward orientation, for use outdoors

**Password Protection****Administrative Level**

**Access:** unrestricted to all functions

**Length:** 8 characters

**Restricted Level**

**Access:** Limits user to read-only activities, modifications to Setup Database are not permitted

**Length:** 8 characters

**Password**

**Access:** limited modifications to Setup Database via front panel

**Length:** 8 digits

**Internal Modem****Type**

V.34, 33,600 Baud, data compression and error correction

**Usage**

Remote access via auto-answer operation

Allows dial-out alarm reporting of Virtual Input records

**Compliance**

Designed to meet FCC part 68 standards

**Dial-out Alarms****Calling Method**

Primary and secondary dial numbers, multiple attempts

Tone or pulse dialing

**Data**

Issues Virtual Input Event Records if enabled by Virtual Input definition

*MICRO-AIDE reserves the right to make changes, at its sole discretion, to any specification listed herein.*

# CWR-264AS SPECIFICATIONS

## Physical

**Size**  
**Length:** 19.0"  
**Height:** 8.1" (requires 10.5" of rack space)  
**Depth:** 3.4"  
**Weight**  
 7.0lb.

## Environmental

**Storage**  
**Temperature:** -50 °C to 85 °C  
**Humidity:** 0 to 95%, non-condensing  
**Operating**  
**Temperature:** -40 °C to 72 °C  
**Humidity:** 0 to 95%, non-condensing

## Mounting

**Standard:** mounts in 19" rack  
**Optional:** 23" rack mounting brackets available

## Construction

**Chassis**  
 Fully enclosed, anodized aluminum  
 Externally accessible LEDs and connectors

## Electrical

All components mounted on conformal coated, internal PCBs

## Power

**Voltage**  
**Range:** 9 to 36 Vdc  
**Consumption**  
**Typical:** 2.0 W  
**Maximum:** 2.5 W

## Isolation

**Power**  
**Minimum:** 3800 Vdc from B and N terminals to chassis and inputs  
**Digital Inputs**  
**Minimum:** 3800 Vdc to any terminal  
**Analog Inputs**  
**Minimum:** 3800 Vdc to any terminal  
**Input to Adjacent Input**  
**Digital:** minimum 3800 Vdc  
**Analog:** minimum 3200 Vdc  
**Ethernet Port**  
**Minimum:** 3800 Vdc to any terminal  
**USB Device Port**  
**Minimum:** 3800 Vdc to any terminal

## Capacities

**Inputs**  
**Digital:** 256, all optically isolated  
**Analog:** 4, voltage only  
**Temporary Buffer Memory**  
**Size:** 266,000 events  
**Type:** Non-volatile, event and Setup Database are stored in flash memory chip, newest data overwrites oldest data  
**Storage Longevity:** Infinite with power off, rated for 100,000 write operations

## Physical Inputs

**Input Impedance**  
**Digital:** minimum 10 KOhms, optically isolated  
**Analog:** minimum 10 MOhms

## Range

**Digital Input-On:** 9 to 36 Vdc  
**Digital Input-Off:** 0 to 1 Vdc  
**Analog DC Voltage:** 3 scales,  $\pm 25.5$  Vdc,  $+51.1$  Vdc,  $\pm 255$  Vdc  
**Analog AC Voltage:** 2 scales, 25.5 Vac, 255 Vac

## Event Validation Times

**Digital:** .01 to 327.67 seconds, compatible with fixed rate flashing circuits  
**Analog:** fast and slow filter settings

## Analog Limit Values

**High and Low Limits:** in multiples of .1 V or 1 V

## Analog Input Accuracy

**Typical Vdc:**  $\pm .15$  Vdc or  $\pm 1.5$  Vdc  
**Typical Vac:**  $\pm .15$  Vac or  $\pm 1.5$  Vac

## Temperature Sensing

**Usage:** measures internal temperature of Secondary Unit, reports to Primary Unit  
**High and Low Limits:** -67 °F to 257 °F

## Ports

**RS-232**  
**Quantity:** 1, for use with a PC  
**Terminal Emulation:** ANSI  
**Baud Rates:** 300, 600, 1200, 2400, 4800, 9600, 19,200, 38,400, 57,600, 115,200  
**Bit Format:** 8-N-1  
**USB Device**  
 Eliminates need for serial comm port, data transfer rates of 4.71 Mbps  
**Ethernet**  
**Type:** 10/100 Base-T  
**Protocols:** UDP for intra-system communications  
 User-assignable IP Address, sub-net mask, Primary Unit IP Address and UDP port

## Connectors

**Power**  
 Detachable, tension clamp, 4-position, 12 to 22 AWG  
 Dual B and N terminals  
**Digital Inputs**  
 Detachable, screw-down, 8-position, 12 to 22 AWG  
**Analog Inputs**  
 Detachable, tension clamp, 8-position, 12 to 22 AWG  
**Terminal Port**  
 DE-9 male, configured as modified DCE  
**USB Device Port**  
 USB Type B female  
**Ethernet Port**  
 RJ-45 female

## Indicators

**Front Panel LEDs (4)**  
**Power:** green  
**Alarm:** red for intra-system LAN failure  
**Terminal:** green, flashes with send and receive data  
**Network:** green, flashes with send and receive data  
**Ethernet Port LEDs (2)**  
**Green:** link established  
**Yellow:** data activity

## Internal Clock

**Accuracy**  
**Typical:**  $\pm 8$  seconds per month (3ppm) when not synchronized by Primary Unit  
**Volatility:** maintains accuracy for minimum of 30 days with loss of power  
**Sync**  
 Synchronized by Primary Unit every 10 seconds

## Password Protection

**Administrative Level**  
**Access:** unrestricted to all functions  
**Length:** 8 characters  
**Restricted Level**  
**Access:** Limits user to read-only activities, modifications to Setup Database are not permitted  
**Length:** 8 characters

*MICRO-AIDE reserves the right to make changes, at its sole discretion, to any specification listed herein.*

## TRANSFER RATES

Table 15 on page 116 lists typical bit transfer rates for each of the CWR-264P user-accessible ports. In each case the same 20,000 Event Records with no-detail formatting were either dumped to a PC file or saved directly to a flash drive. The times listed are normalized relative to 1,000 Event Records. If speed is a concern, using the USB Device Port is highly recommended.

Port	Time to transfer 1,000 Event Records (sec)	Actual transfer rate (bps)	Relative speed compared to 38,400
Terminal Port (38,400)	19.0	38,396	Used as reference
Internal modem	19.4	37,649	1.0 times faster
Terminal Port (115,200)	6.4	114,845	3.0 times faster
USB Host Port	.8	n/a	22.4 times faster
Ethernet Port	.2	4,704,075	122.5 times faster
USB Device Port	.2	4,714,063	122.8 times faster

Table 15: Bit Transfer Rates by Port

## TERMINAL PORT CABLE

Two of the following cables are included with every CWR-264AX Recording System.

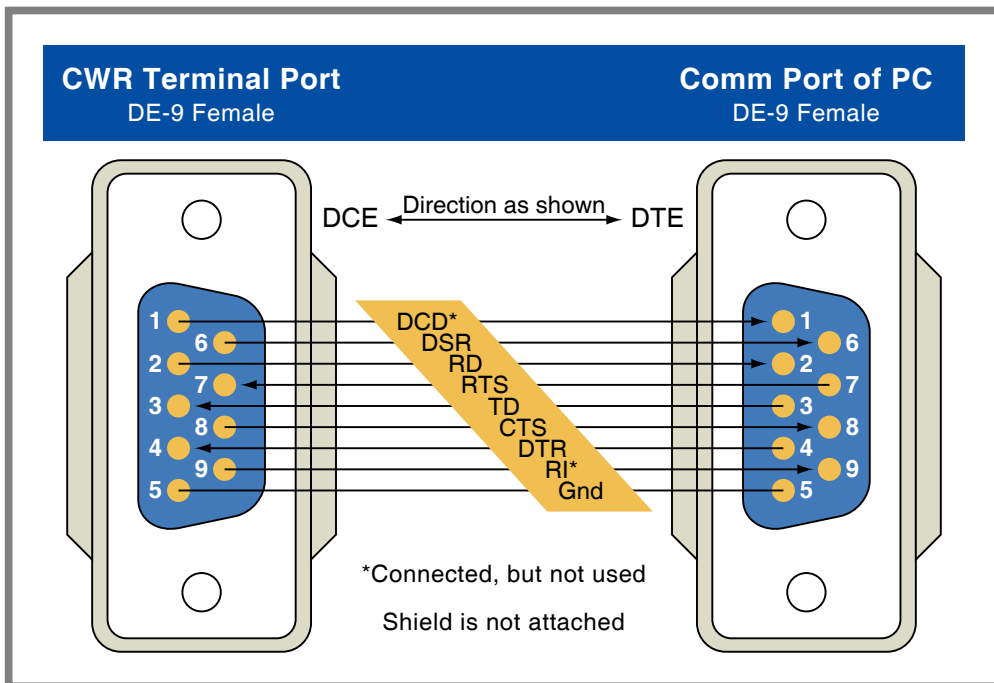


Figure 14: Terminal Port Cable - Wiring Diagram

A