

# APPENDIX A – TECHNICAL DATA

## SPECIFICATIONS

### Physical

#### Size

**Length:** 19.0"

**Height:** 7.8" (requires 10.5" of rack space)

**Depth:** 3.8"

#### Weight

7.0lb.

### Environmental

#### Storage

**Temperature:** -50 °C to 85 °C

**Humidity:** 0 to 95%, non-condensing

#### Operating

**Temperature:** -40 °C to 72 °C

**Humidity:** 0 to 95%, non-condensing

### Mounting

**Standard:** mounts in 19" rack

**Optional:** 23" rack mounting brackets available

### Construction

#### Chassis

Fully enclosed, anodized aluminum

Externally accessible keypad, LEDs and connectors

#### Electrical

All components mounted on conformal coated, internal PCBs

### Power

#### Voltage

**Range:** 9 to 36 Vdc

#### Consumption

**Typical:** 7W

**Maximum:** 8W (with Ethernet and Modem options)

### Isolation

#### Power

**Minimum:** 3800 Vdc from B and N terminals to chassis and inputs

#### Digital Inputs

**Minimum:** 3800 Vdc to any terminal

#### Analog Inputs

**Minimum:** 3800 Vdc to any terminal

#### Input to Adjacent Input

**Digital:** minimum 3800 Vdc

**Analog:** minimum 3200 Vdc

#### Ethernet Port (optional)

**Minimum:** 3800 Vdc to any terminal

#### Internal Modem (optional)

Designed to meet FCC part 68 standards

### Capacities

#### Inputs

**Digital:** 256, all optically isolated

**Analog:** 8 total, 4 can measure current

**Virtual:** 96, user-assigned

**Timer:** 200, user-assigned

**Train Speed Monitor:** 8, user-assigned

#### Outputs

**Relay:** 2, form C, rated for 2A at 24 Vdc or 1A at 125 Vac, maximum switching capacity of 125 VA or 60 W, service life 1 million electrical (typical)

#### Event Storage

**Standard:** 94,024 records

**Maximum:** 2,304,712 records

#### Liquid Crystal Display

**Characters:** 80 total on 4 lines

**Viewing Area:** 2.8" by .8"

#### Front Panel Keypad

**Quantity:** 20 keys

### Physical Inputs

#### Input Impedance

**Digital:** minimum 10K Ohms, optically isolated

**Analog:** minimum 10M Ohms

#### Range

**Digital Input-On:** 9 to 36 Vdc

**Digital Input-Off:** 0 to 2 Vdc

**Analog DC Voltage:** 3 scales,  $\pm 25.5$  Vdc,  $+51.1$  Vdc,  $\pm 25.5$  Vdc

**Analog AC Voltage:** 2 scales, 25.5 Vac, 255 Vac

#### Event Validation Times

**Digital:** .01 to 327.67 seconds, compatible with fixed rate flashing circuits

**Analog:** fast and slow filter settings

### Analog Limit Values

**High and Low Limits:** in multiples of .1 V or 1 V

### Analog Input Accuracy

**Typical Vdc:**  $\pm 1.5$  Vdc or  $\pm 1.5$  Vdc

**Typical Vac:**  $\pm 1.5$  Vac or  $\pm 1.5$  Vac

### Virtual Inputs

#### Definitions

Any logical association shared by 1 to 4 variables (i.e., Digital, Analog, Timer or other Virtual Inputs)

Assigned by defining the state of the Virtual Input for each combination of variable states

#### Reporting

Creates standard Event Records

Relays can be controlled by each Virtual Input

Modem (optional) can be enabled to dial out Event Records

### Timer Inputs

#### Programming

Any input can be assigned as a trigger or terminating source

On or Off events can be assigned as a trigger or terminating source

#### Limit Values

**High and Low Limits:** in multiples of .1 seconds

**Range:** 0.0 to 999.9 seconds

#### Reporting

Measured Time is reported in each Timer Input Event Record

Violation of Limit Values are also reported

### Temperature Sensing

**Usage:** measures and reports internal temperature of recorder

**High and Low Limits:** -67 °F to 257 °F

### Train Speed Monitor

#### Operation

Reports excessive train speed

Logs standard Event Record

#### Sensors

**Digital Inputs:** 2 required

**Distance:** 50' to 5280'

#### Limit Values

5 to 180mph

### Ports

#### RS-232

**Quantity:** 2, for use with a PC

**Terminal Emulation:** ANSI

**Baud Rates:** 300, 600, 1200, 2400, 4800, 9600, 19,200, 38,400, 57,600, 115,200

**Bit Format:** 8-N-1

#### Ethernet (optional)

**Type:** 10/100 Base-T

**Protocols:** TCP/IP, Telnet, Modbus, SNTP-Unicast and -Multicast,

**Concurrent Sessions:** Modbus (5), Telnet (1)

Provides remote or local access via TCP/IP

Data transfer rates of 4.70Mbps

User-assignable IP Address, Telnet port, sub-net mask, Unicast IP Address

#### Modem (optional)

Provides remote access, auto-answer

A

**Memory****Type**

Non-volatile, Event Records and Setup Database are stored in flash memory chip

Newest data over-writes oldest data, 129th day over-writes first day

**Storage Longevity**

Infinite with power off

Rated for 100,000 write operations

**Connectors****Power**

Detachable, screw-down, 4-position, 12 to 22 AWG

Dual B and N terminals

**Digital Inputs**

Detachable, screw-down, 8-position, 12 to 22 AWG

**Analog Inputs**

Detachable, screw-down, 8-position, 12 to 22 AWG

**Relays (2)**

Detachable, screw-down, 6-position, 12 to 22 AWG

Normally open, normally closed and common terminals per relay

**Terminal Port (2)**

DE-9 male, configured as modified DCE

**Printer Port**

DB-25 female, standard parallel printer configuration

**Current Sensor**

DE-9 female, used with CWR-CS

**Ethernet Port (optional)**

RJ-45 female

**Telephone Line (2)**

RJ-11 female, wired in parallel

**Indicators****LCD Panel**

Includes LED back lighting for enhanced visibility

Displays numerous command menus for configuring the recorder and retrieving data

**Front Panel LEDs (3)**

**Power:** green

**Terminal:** green, flashes with send and receive data

**Modem:** green, flashes with send and receive data and ringing

**Ethernet Port LEDs (2, optional)**

**Green:** link established

**Yellow:** data activity

**Controls****Keypad**

Located on front panel, below LCD

**Keys:** 0-9, Browse, Alpha, Setup, Esc, Enter, Save/., left, right, up, down/-

**LCD Contrast Adjust**

Single-turn pot., accessible from front panel

**Internal Clock****Accuracy**

**Typical:**  $\pm 1$  minute per month (20 ppm) when not synchronized

**Volatility:** maintains accuracy for minimum of 30 days with loss of power

**Resolution:** .01 seconds for all Event Records

**Sync**

**SNTP-Unicast:** via time server, 5 minutes past each hour

**SNTP-Multicast:** per time server schedule

**Operation**

**Time Zones:** selectable from 7 different North American settings

**Daylight Saving Time:** enable or disable automatic adjustment

**Leap Year:** automatically adjusted

**Password Protection****Administrative Level**

**Access:** unrestricted to all functions

**Length:** 8 characters

**Restricted Level**

**Access:** Event Record and Setup Database viewing only

**Length:** 8 characters

**Passcode**

**Access:** limited modifications to Setup Database via front panel

**Length:** 8 digits

**Internal Modem (optional)****Type**

V.34, 33,600 Baud, data compression and error correction

**Usage**

Remote access via auto-answer operation

Allows dial-out alarm reporting of Virtual Input records

**Compliance**

Designed to meet FCC part 68 standards

**Dial-out Alarms (optional)****Calling Method**

Primary and secondary dial numbers, multiple attempts

Tone or pulse dialing

**Data**

Issues Virtual Input Event Records if enabled by Virtual Input definition

*MICRO-AIDE reserves the right to make changes, at its sole discretion, to any specification listed herein.*

# TRANSFER RATES

Table 13 on page 89 lists typical bit transfer rates for each of the CWR-264E's user-accessible ports. In each case the same 20,000 Event Records with no-detail formatting were either dumped to a PC file or saved directly to a flash drive. The times listed are normalized relative to 1,000 Event Records. If speed is a concern, using the optional Ethernet Port is highly recommended.

Port	Time to transfer 1,000 Event Records (sec)	Actual transfer rate (bps)	Relative speed compared to 38,400
Terminal Port (38,400)	19.0	38,396	Used as reference
Internal modem	19.4	37,649	1.0 times faster
Terminal Port (115,200)	6.4	114,845	3.0 times faster
Ethernet Port (optional)	.2	4,704,075	122.5 times faster

Table 13: Bit Transfer Rates by Port

# TERMINAL PORT CABLE

The following cable is included with every CWR-264E.

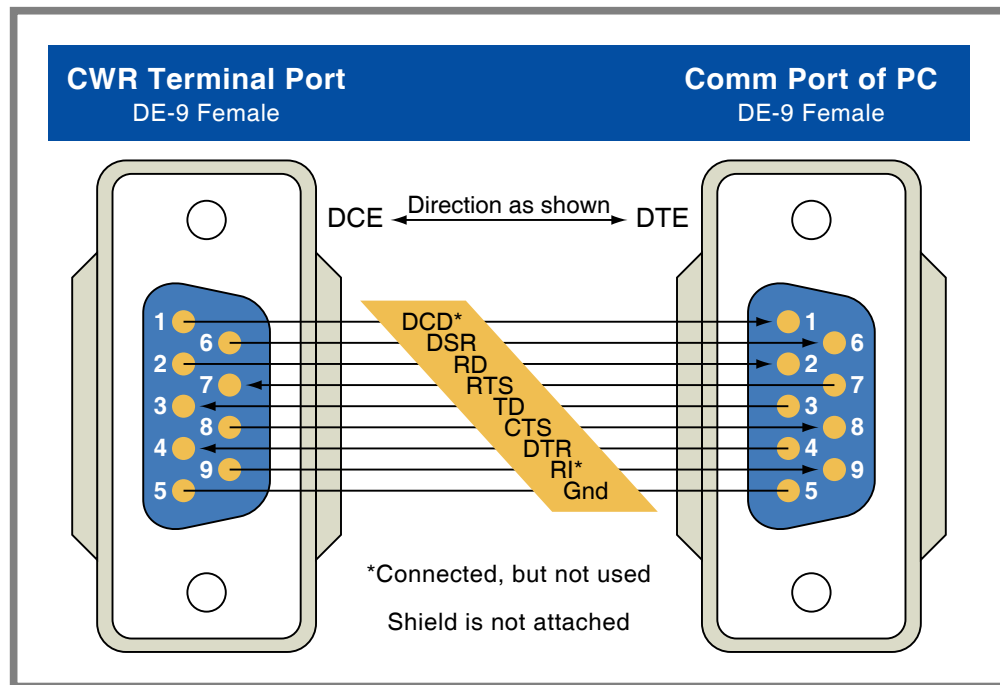


Figure 11: Terminal Port Cable-Wiring Diagram

A